

DESCRIPTION

SureSlope™ DST Drain Set 4' x 4' and 8' x 8' are produced with a closed-cell polyisocyanurate (polyiso) foam core integrally laminated to non-asphaltic, glass fiber reinforced organic felt or inorganic coated-glass facers on both sides. The dimensionally stable SureSlope DST provides a positive 4-way slope to the roof drain. Used in Built-Up (BUR), Modified Bitumen, Ballasted Single-Ply, Mechanically Attached Single-Ply and Adhered Single-Ply Roofing Systems

FEATURES & BENEFITS

One-Piece Pre-Fabricated Drain Set: 4'x4' (1220mmx1220mm)

- Perimeter Thickness: 1.5" (38.1mm) Maximum
- Center Thickness: 0.5" (12.7mm) Minimum
- Slope: 0.5" per ft (4.0%)

Four-Piece Pre-Fabricated Drain Set: 8'x8' (2439mmx2439mm)

- Perimeter Thickness: 2.5" (63.5mm) Maximum
- Center Thickness: 0.5" (12.7mm) Minimum
- Slope: 0.5" per ft (4.0%)


INSTALLATION

SureSlope™ DST Drain Set shall be kept dry before, during and after installation. This product will burn if exposed to an ignition source of sufficient heat and intensity. Do not apply flame directly to SureSlope™ DST Drain Set insulation. Refer to product packaging, Atlas Technical Bulletin #12 and PIMA Technical Bulletin #109 for storage and handling recommendations.


DIMENSIONS & PACKAGING

PRODUCT	THICKNESS		PRODUCT DIMENSIONS		PACKAGING SPECIFICATIONS	LTR VALUE	THERMAL DATA			
	MIN	MAX	WIDTH	LENGTH	PIECES PER UNIT		THICKNESS	**RSI	SLOPE	
									PER FT.	PERCENT
SureSlope DST 4' x 4'	0.5" (12.7mm)	1.5" (38.1mm)	48" (1,220mm)	48" (1,220mm)	32	5.7	0.5"-1.5" (12.7mm-38.1mm)	1.00	0.5"	4.0%
SureSlope DST 8' x 8'	0.5" (12.7mm)	2.5" (63.5mm)	96" (2,439mm)	96" (2,438mm)	5	8.6	0.5"-2.5" (12.7mm-63.5mm)	1.51	0.5"	4.0%

**RSI is the metric expression of R-value (m² • K/W).

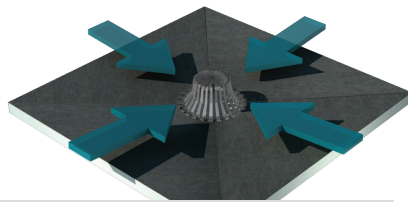

SureSlope™ DST 4'x4'

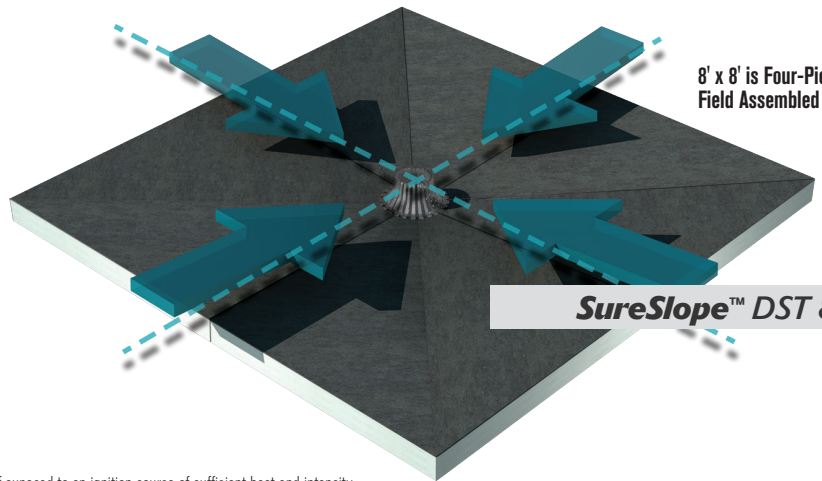

8' x 8' is Four-Pieces, Field Assembled

SureSlope™ DST 8'x8'

SureSlope™ DST Drain Set shall be kept dry before, during and after installation. This product will burn if exposed to an ignition source of sufficient heat and intensity. Do not apply flame directly to SureSlope DST Drain Set insulation. Refer to product packaging, Atlas Technical Bulletin #12 and PIMA Technical Bulletin #109 for storage and handling recommendations.


SUSTAINABILITY

Atlas polyiso insulation is manufactured using environmentally responsible processes and formulations.

- Contains no CFCs, HCFCs or HFCs
- Zero Ozone Depletion Potential (ODP)
- Negligible Global Warming Potential (GWP)
- GREENGUARD Gold Certification
- Contributes to LEED credits

For more information visit roof.atlasrwi.com/about-roof/sustainability

TYPICAL CROSS SECTIONS

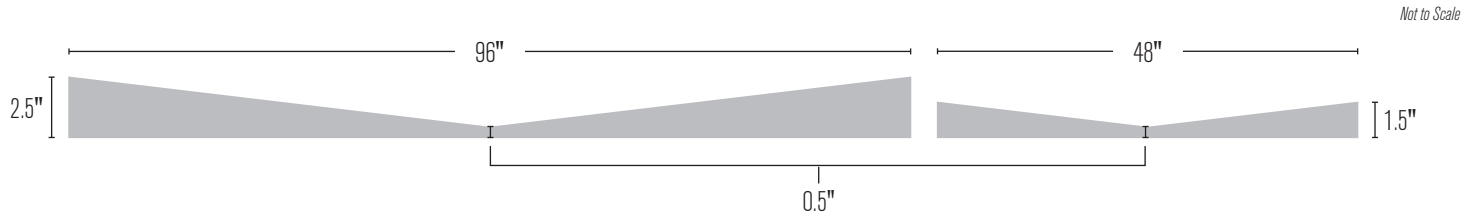

WARRANTY

SureSlope is backed by a Limited 20-Year Thermal Warranty. For complete terms and conditions, visit roof.atlasrwi.com/warranty

FOR A COMPLETE LIST OF PRODUCT SIZES, SCAN OR CLICK QR CODE TO DOWNLOAD THE PACKAGE & LOADING GUIDE



Other than the aforementioned representations and descriptions, Atlas Roofing Corporation (hereafter, "Seller") makes no other representations or warranties as to the insulation sold herein. The Seller disclaims all other warranties, express or implied, including the warranty of merchantability and the warranty of fitness for a particular purpose. Seller does, however, have a limited warranty as to the LTTR-Value of the insulation, the terms of which are available upon request from the Seller. Seller shall not be liable for any incidental or consequential damages including but not limited to the cost of installation, removal, repair or replacement of this product. Buyer's remedies shall be limited exclusively to, at Seller's option, the repayment of the purchase price or resupply of product manufactured by Atlas in a quantity equal to that of the nonconforming product. Atlas distributors, agents, salespersons or other independent representatives have no authority to waive or alter the above limitation of liability and remedies.



Atlas Roofing Corporation
2000 Riveredge Parkway, Suite 800 • Atlanta, GA • 30328
844-641-1402 • roof.atlasrwi.com

