


Bevel Cut ACFoam[®] in metal roofing retro fit application

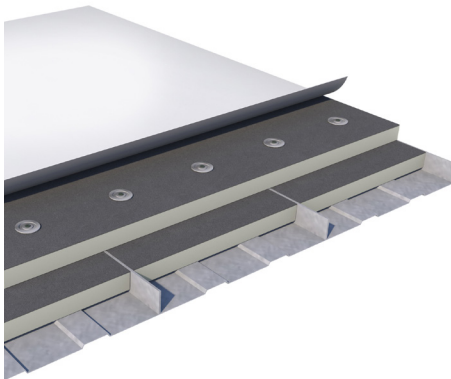


Square Cut ACFoam[®] in metal roofing retro fit application

Introducing custom fabricated square and bevel cut polyiso roof insulation.

- Fabricated from thermally efficient closed-cell ACFoam[®]
- Perfect for flute filler in metal roofing retro fit systems
- Use as void filler to meet polyiso span ability requirements in all roofing applications

Why ACFoam[®] Square or Bevel Cut

- Manufactured from ¹ACFoam[®]-II, ²ACFoam[®]-III or ³ACFoam[®] Supreme Polyiso Roof Insulation
- Refer to individual product data sheets for polyiso physical property, thermal performance and code compliance data.*
- Highest R-value per inch of thickness
 - Excellent dimensional stability
 - Superior performance in fire tests
 - Fabricated in a controlled manufacturing facility
 - Reduced job site waste and installation time
 - Custom cut from 1.0"-4.0" ACFoam[®], providing long-term thermal resistance (⁴LTTR) values from 4.3 to 23.6.
 - Available in 4' or 8' lengths up to 48" wide
 - Available in all US and CAN markets

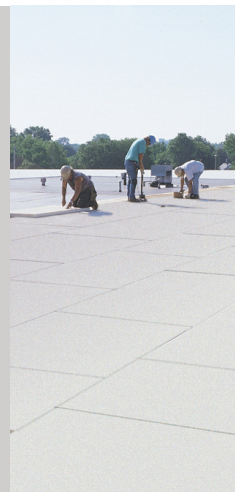

ACFoam[®] Square and Bevel Cut That's Custom Cut for Your Specific Job.

ACFoam[®] Square and Bevel Cut ISO ASTM Classifications:

1-Glass Reinforced Felt (GRF): ASTM C1289 Type II, Class 1, Grade 2 (20 psi) or Grade 3 (25 psi) | **2**-Coated Glass Facer (CGF): ASTM C1289 Type II, Class 2, Grade 2 (20 psi) or Grade 3 (25 psi) | **3**-Reflective Foil Facer (Foil): ASTM C1289 Type I, Class 1, Grade 2 (20 psi) or Grade 3 (25 psi)
4-LTTR (long term thermal resistance) values were determined in accordance with CAN/ULC-S770-09. Test samples were third-party selected and tested by an accredited material testing laboratory. The LTTR results were reviewed by FM Global and certified by the PIMA Quality Mark Program. *To minimize the effects of thermal bridging, Atlas strongly recommends the use of multiple layers when the total desired or specified R-value requires an insulation thickness greater than 2.7" thick. Visit atlasroofing.com for an extended list of product thicknesses.